



ESSAILEC®

Coding




COP-E-1




COP-FI-1


Socket





Plug



Reading direction

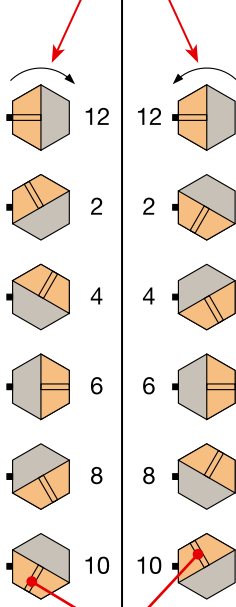


Coding pins index

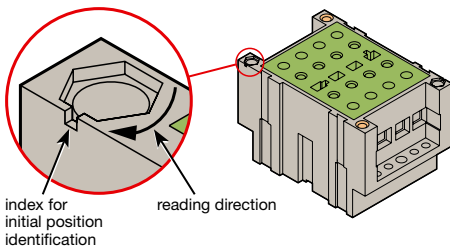



On socket:

- 1 Choose a coding code (12-12 for instance).



- 2 Insert completely the coding pin COP-E-1 in its housing.




Position 12


On plug:

In order to guarantee a perfect compatibility between the socket coding and the plug coding, the following must be done:

- 1 Place the COP-FI-1 coding pin in the opening left by the socket coding pin.

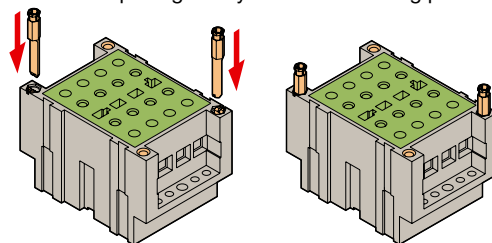

- 2 Connect the plug on the socket in order to insert the plug coding pin in its housing.

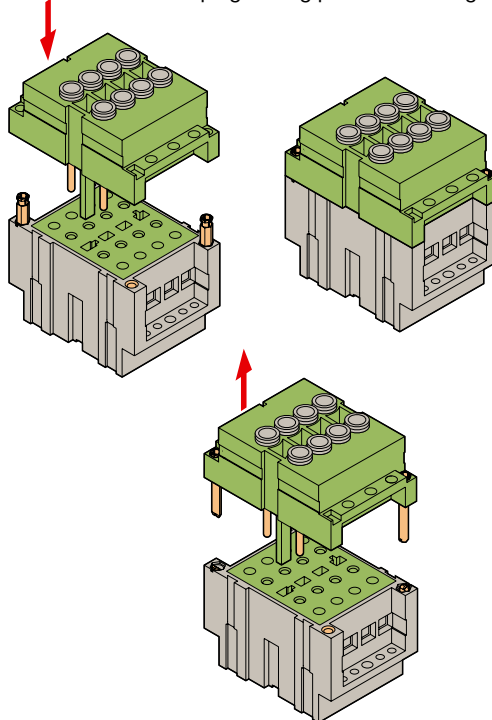

Description	Type	Order code	Packaging	Weight kg
Socket coding pin	COP-E-1	1SNA 167 379 R1200	10	
Plug coding pin	COP-FI-1	1SNA 167 378 R1100	10	
Supplied with sockets and plugs				